



Item: _____

Quantity: _____

Project: _____

Electric Convection Oven - Bakery Depth

Electric Convection Oven - Bakery Depth

Models: RECOD-1 RECOD-2



Voltage:

- 208 - 1 Phase 208 - 3 Phase
- 240 - 1 Phase 240 - 3 Phase

Options and Accessories

- Stainless steel bottom shelf (RECOD-1 Only)
- Stacking kit to stack two single deck units (includes 6" legs)
- 5" swivel casters (set of four - 2 locking)
- Extra oven racks (Qty: _____)
- Glass view door for left side (right is standard)
- Pan rack (RECOD-1 Only)
- 480 Voltage - 3 Phase
- Moisture injection

Standard Features


- Accommodates full size sheet pans front to back and side to side
- 3 heating elements for a total of 12 KW power
- Electric thermostat adjustable from 150° to 500° F
- Two speed motor
- Cool touch controls set back for protection
- Glass window in the right hand door
- Two interior lights
- Oven interior is porcelain coated for easy cleaning
- Doors feature 3 brass bushings per door hinge for perfect door alignment
- Oven doors swing open 135° for easier access for loading and removing pans
- 5 Chrome plated racks standard with 11 positions
- All S/S front, sides, and top construction
- Oven interior useable space: 29" W x 26½" D x 24" H
- Unique stackable design
- One year limited warranty, parts and labor



Royal Range of California, Inc.
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com



Electric Convection Oven - Bakery Depth

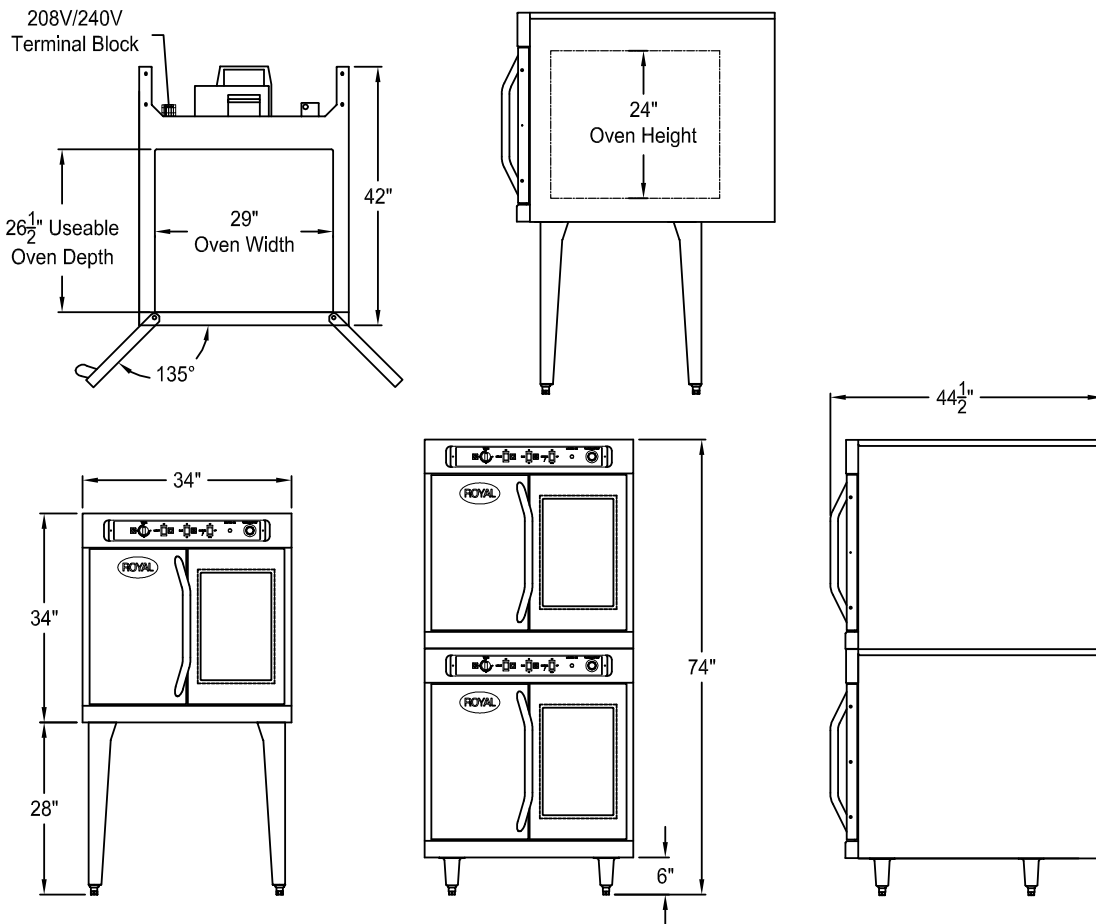

| Model Number | Total KW | Ship Weight |
|--------------|----------|-------------|
| RECOD-1 | 12 | 535 lbs. |
| RECOD-2 | 24 | 1,020 lbs. |

Electrical: Two speed motor (1725/1140 rpm) 230 V, 50/60 Hz, 1/2 HP
Terminal block for power cord connection with ground lug.

Heating Elements:

| Voltage (V) | Phase | Total KW | Current (Amps) |
|-------------|-------|----------|---------------------|
| 208 | 1 | 12 | 60 |
| 208 | 3 | 12 | L1-35, L2-34, L3-34 |
| 240 | 1 | 12 | 50 |
| 240 | 3 | 12 | L1-30, L2-29, L3-29 |
| 480 | 3 | 12 | L1-16, L2-15, L3-15 |

Clearances:

| | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear | 0" | 0" |
| Sides | 0" | 0" |

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com