



Item: _____

Quantity: _____

Project: _____

Salamander Broiler

Salamander Broiler

Models: RSB-24 RSB-36 RSB-48



Gas Type: Natural LP

Elevation (if above 2000 ft.): _____

Range Mount Wall Mount

Range Width: _____"
(Range width necessary to determine bracket type. Width of Salamander cannot exceed range width.)

Standard Features

- Full width, removable stainless steel crumb pan for easy cleaning
- Stainless steel front and sides
- Individually adjustable infra-red burners provide powerful radiant heat
- Spring balanced broiler grid moves up and down with positive locking in three positions
- Standing pilots for instant safe ignition
- Easy loading and unloading with a roll-out carriage
- Stainless steel tubing for pilots
- One year limited warranty, parts and labor

Options and Accessories


- 3/4" gas connection from range to RSB



Royal Range of California, Inc.
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com



Salamander Broiler

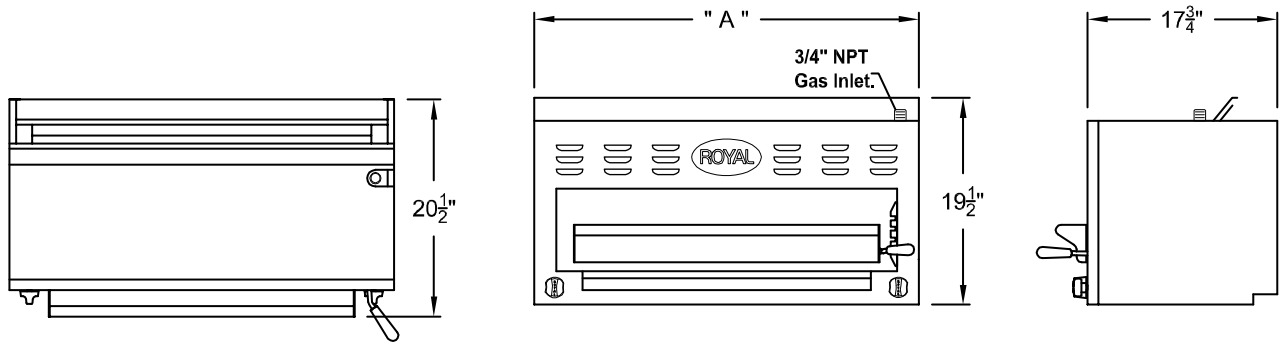

Model Number	Width (A)	Number of Burners	Total BTU	Ship Weight
RSB-24	24"	1 ¹	17,500	160 lbs.
RSB-36	36"	2 ¹	35,000	210 lbs.
RSB-48	48"	2 ²	40,000	252 lbs.

Notes:

1. Infra-red burners rated at 17,500 BTU/hr each.
2. Infra-red burners rated at 20,000 BTU/hr each.

Gas Connection:

$\frac{3}{4}$ " NPT on the right hand rear of the appliance.
The pressure regulator (supplied) is to be connected by the installer.

Gas Pressure:

5" W.C.	Natural Gas
10" W.C.	Propane

Clearances:

	Combustible	Non-Combustible
Rear	4"	0"
Sides	4"	0"

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.