



Item: _____

Quantity: _____

Project: _____

50 lb. Deep Fat Fryer & Filter

50 lb. Deep Fat Fryer & Filter

Model: RFT-50-2F RFT-50-3F



Shown with optional flush hose

Gas Type: Natural LP

Elevation (if above 2000 ft.): _____

Standard Filter Features

- 8 gpm filter pump for fast filtering
- Rear oil return for vessel bottom flushing
- All stainless filter pan assembly with crumb catch basket and 4 swivel casters
- Filter pan lid with splash guard
- 25 sheet sample filter paper
- 5' filter pump power cord

Standard Features

- All stainless steel front and sides
- Two stainless steel tank assemblies, 50 lb capacity each
- Frying Area each tank: 14" x 14"
- Cast iron burners rated at 38,000 BTU/hr each
- Stainless steel joiner strip
- Millivolt control system with 100% safety shut off
- Thermostatic control with 200°-400° F range
- Twin fry baskets each tank with plastic coated handles for ease of handling
- 1¼" full port drain valve each tank
- 6" high adjustable heavy duty legs
- Five year limited (prorated) warranty on S/S tank
- One year limited warranty, parts and labor


Options and Accessories

- Stainless steel tank cover
- Stainless steel side splash guard
- 48" quick disconnect and restraining cable
- 5" swivel casters (set of four - 2 locking)
- 5' flush hose & nozzle assembly (wand) with easy connection to front of chassis

Royal Range of California, Inc.
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com



50 lb. Deep Fat Fryer & Filter

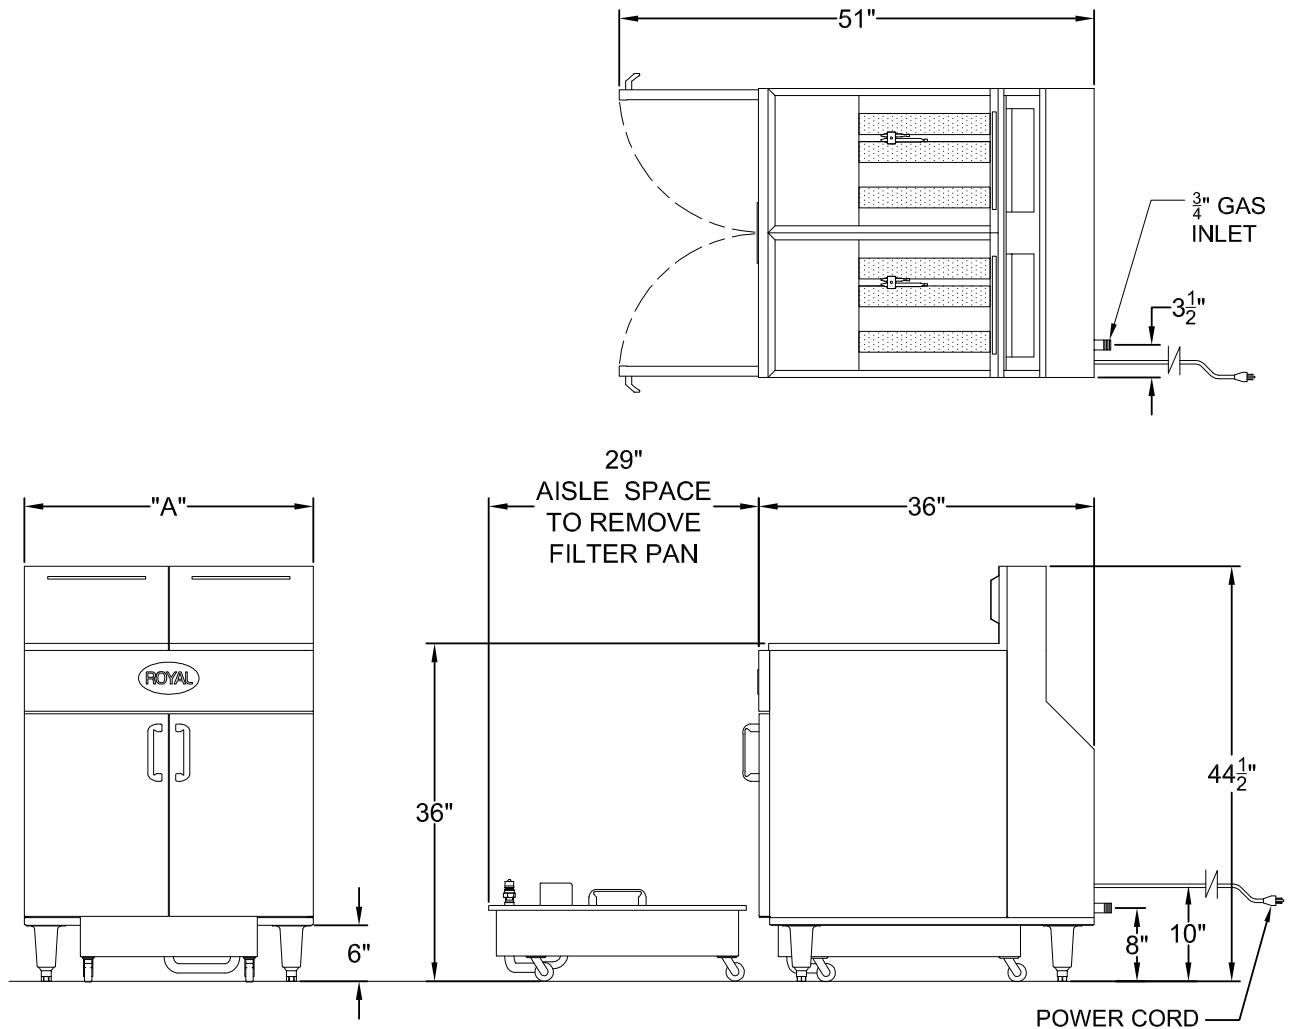

Model Number	Width "A"	Cooking Area Each Tank	Number of Burners/Tank	Total BTU Each Tank	Ship Weight
RFT-50-2F	31"	14" x 14"	3	114,000	400 lbs.
RFT-50-3F	46.5"	14" x 14"	3	114,000	650 lbs.

Filter Electrical Requirements, 50/60 Hz:

Volt / Phase	Amps
Ph 1, 115	7

Gas Pressure:

4" W.C.	Natural Gas
11" W.C.	Propane

Clearances:

	Combustible	Non-Combustible
Rear	6"	0"
Sides	6"	0"

Notes:

Gas Connection:

3/4" NPT on the left rear of the appliance.
No external pressure regulator required.

Specify type of gas and altitude, if over 2,000 feet, when ordering

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com