



Item: _____

Quantity: _____

Project: _____

RADIANT BROILER

Delux Series

Models:	<input type="checkbox"/> RB-815	<input type="checkbox"/> RB-821	<input type="checkbox"/> RB-825	<input type="checkbox"/> RB-830	<input type="checkbox"/> RB-836
	<input type="checkbox"/> RB-841	<input type="checkbox"/> RB-846	<input type="checkbox"/> RB-860	<input type="checkbox"/> RB-872	<input type="checkbox"/> RB-884



RB-25

Gas Type: Natural LP

Elevation (if above 2000 ft.): _____

Standard Features

- Fully welded frame with lifetime warranty
- 1,200°F mineral wool insulation
- Easily removable and replaceable independent firebox assembly on broiler
- Heavy cast iron burners rated at 14,500 BTU/hr every 6"
- Heavy cast iron radiants
- Two position cast iron top grates
- Stainless steel drip pan
- Stainless steel sides and front valve cover
- 4" high adjustable heavy duty legs included



Options and Accessories

- 3/8" round steel rod grate, non-adjustable height (fish, chicken, steak & veg.)
 - 3/8" round stainless steel rod grate, non-adjustable height (fish, chicken, steak & veg.)
 - 3/8" square steel rod grate, non-adjustable height (all uses)
 - 3/8" square stainless steel rod grate, non-adjustable height (all uses)
 - Cast iron criss cross (diamond) grates, non-adjustable height (all uses)
 - Stainless Steel Equipment Stand
 - Knock Down All Welded
- Size**
- 18" 24" 30" 36" 48" 60" 72"
 - 5" swivel casters (set of four - 2 locking)
 - 5" swivel casters (set of six- 3 locking for 60" and 72" stands)



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

RADIANT BROILER

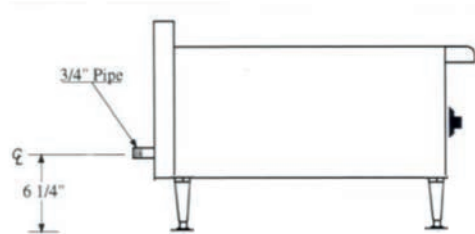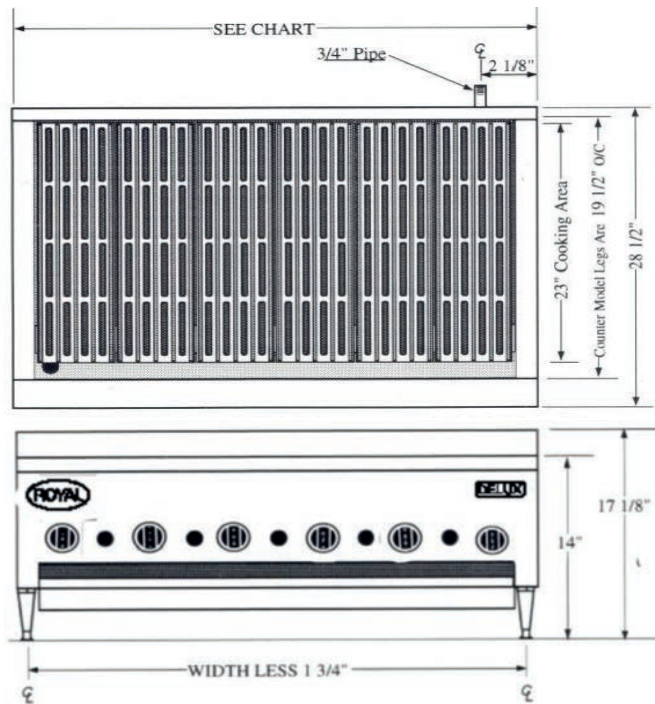

Model Number	Width	Burners	Total BTU	Ship Weight
RB-815	14 1/2"	2	29,000	135 lbs.
RB-821	21"	3	43,500	178 lbs.
RB-825	25"	4	58,000	205 lbs.
RB-830	30 3/8"	5	72,500	248 lbs.
RB-836	35 3/4"	6	87,000	301 lbs.
RB-841	41 1/8"	7	101,500	358 lbs.
RB-846	46 1/2"	8	116,000	400 lbs.
RB-860	60"	10	145,000	468 lbs.
RB-872	71"	12	174,000	520 lbs.
RB-884	84"	15	217,500	730 lbs.

Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Gas Pressure:

5" W.C.	Natural Gas
10" W.C.	Propane

Clearances: For installation in non combustible locations only

	Combustible	Non-Combustible
Rear	N/A	0"
Sides	N/A	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com